


INSTALLATION

Above Windshield *(Refer to Figure 1)*

- A)** Loosen the mirror head mounting arm screw so as to disengage the locking teeth.
- B)** Place the clamping bracket over the windshield frame (*knobs on inside of boat*), and securely tighten the thumb knobs on the clamping bracket.
**Be sure to affix the anti-scratch pad to your windshield frame for protection.*
- C)** Move the mirror head/arm into a position similar to that as shown in Figure 1.
- D)** Tighten the phillips head screw so that the locking teeth are firmly engaged. Adjust mirror, as needed.


Mounted Above Windshield
Fig. 1

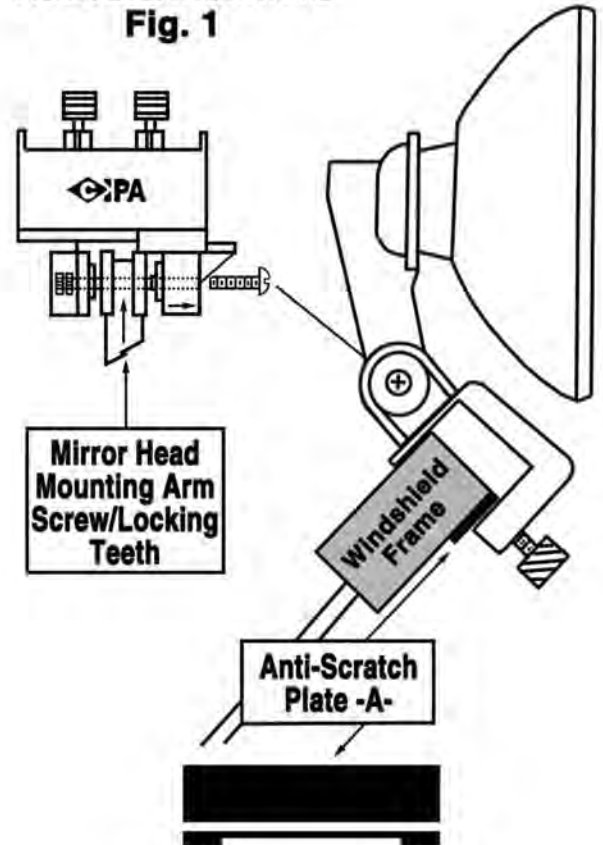

Below Windshield *(Refer to Figure 2)*

- A)** Loosen the phillips head screw to disengage the locking teeth.
- B)** Place the clamping bracket over the windshield frame (*knobs on outside of frame*), and securely tighten the thumb knobs on the clamping bracket.
- C)** Move the mirror head/arm into a position similar to that as shown in Figure 2.
- D)** Tighten the phillips head screw so that the locking teeth are firmly engaged. Adjust mirror, as needed.

Mounted Below Windshield
Fig. 2

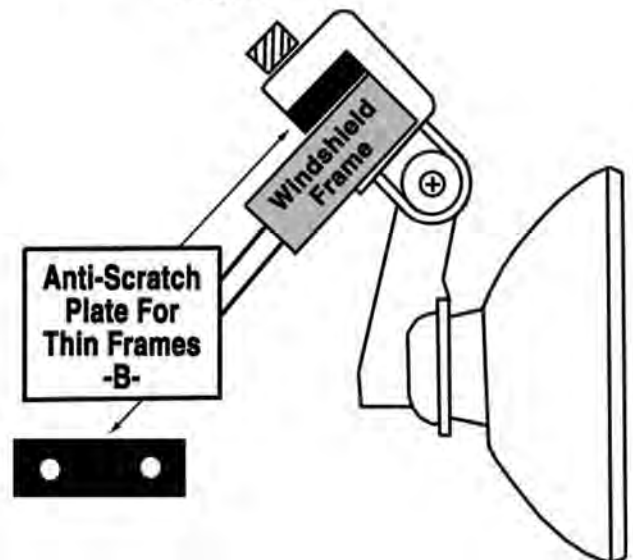

Mounting Plates

- A)** Two Different Anti-Scratch mounting plates are included with your mirror.
- B)** Mounting Plate (A) is for standard thickness (5/8"-3/4") windshield frames (See Fig. 1). Peel back the paper on adhesive and place on the windshield frame where you will mount the mirror.
- C)** Mounting Plate (B) is for windshield frames that are thinner than 5/8" (See Fig. 2). The plate will be placed between the mirror clamp bracket and the windshield frame, during installation.